
Typical Installation

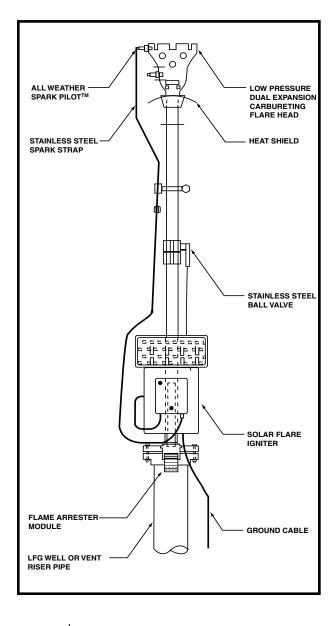

Model CF-5(6V)

Capacity: 2-90 SCFM

1

Model CF-10(12V)
Capacity: 5-140 SCFM

Components










www.solar-spark.com

Apalachin, NY



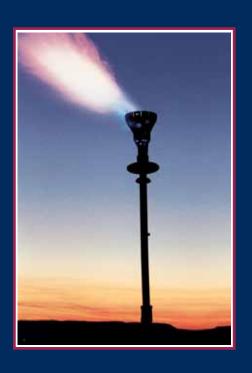





Solar Spark® Vent Flares are simple, reliable, solar-ignited flares mounted directly on all types of landfill vents. These flares eliminate foul odors associated with flammable gas emissions.

Even in cloudy conditions the solar panel provides continuous ignition with no need for external power.

The patented Dual Expansion Carbureting Flare Head is designed for effective combustion of landfill gas at a wide range of ambient pressures from 2-140 SCFM. The unique flare head design also allows for operation in extremely windy conditions.

The ruggedly constructed Spark-PilotTM provides a continuous ignition spark even in rainy conditions.

Accessories



Guy Wire Kit



Cold Weather Insulation Kit



Data Logger

Features

- † Eliminates Odors
- ⁴ Economical
- * Simple
- * Reliable
- * Easy to Install

Alternative Mounting Options



The Solar Spark
Vent Flare can
be custom
mounted to fit
any situation.
Contact us for
details.

Manufacturer Direct Pricing

The complete package includes solar ignition system, Spark-Pilot, flare head, flame arrester, piping, and stainless steel ball valve. All parts carrry a one year warranty.

Flange adapters, insulation kits, and other custom components are available to meet your needs.

Would you like more information? Contact us for a custom quote.



2183 Pennsylvania Avenue Apalachin, NY 13732 phone: 800-800-7671 fax: 607-625-2689

www.solar-spark.com

